



Smart  
connections.

Data sheet

PIKO 2.5 MP

2.5

# Technical data PIKO 2.5 MP



- Single-phase feed-in
- Transformerless conversion
- Wide input voltage range
- Long life cycle thanks to effective cooling technology
- Standard integrated communication package with data logger, web server and solar
- Simple menu-guided operation and installation
- Light weight
- Convenient connection area and integrated DC switch
- Energy meters can be integrated

## Input side (DC)

Max. PV power ( $\cos \varphi = 1$ )	kWp	3.1
Rated input voltage ( $V_{DC,r}$ )	V	320
Max. input voltage ( $V_{DCmax}$ )	V	600
Min. input voltage ( $V_{DCmin}$ )	V	125
Start-up input voltage ( $V_{DCstart}$ )	V	150
Max. MPP voltage ( $V_{MPPmax}$ )	V	500
Min. MPP voltage for DC rated output in single tracker mode ( $V_{MPPmin}$ )	V	225
Min. MPP voltage for DC rated output in two-tracker mode ( $V_{MPPmin}$ )	V	-
Max. input current ( $I_{DCmax}$ )	A	11.5
Max. input current with parallel connection (input DC1+DC2)	A	-
Number of DC inputs		1
Number of independent MPP trackers		1

## Output side (AC)

Rated output, $\cos \varphi = 1$ ( $P_{AC,r}$ )	kW	2.5
Max. output apparent power, $\cos \varphi, adj$	kVA	2.5
Max. output voltage ( $V_{ACmax}$ )	V	276
Min. output voltage ( $V_{ACmin}$ )	V	185
Rated output current	A	11
Max. output current ( $I_{ACmax}$ )	A	14
Short-circuit current (peak / RMS)	A	42/14
Grid connection		1~, AC, 230V
Rated frequency ( $f_r$ )	Hz	50
Max. grid frequency ( $f_{max}$ )	Hz	65
Min. grid frequency ( $f_{min}$ )	Hz	45
Setting range of the power factor $\cos \varphi_{AC,r}$		0.95 ... 1 ... 0.95
Power factor for rated power ( $\cos \varphi_{AC,r}$ )		1
Max. total harmonic distortion	%	<2

## Device properties

Standby consumption	W	<4
---------------------	---	----

## Efficiency

Max. efficiency	%	98
European efficiency	%	97.6
MPP adjustment efficiency	%	99.7

## Warranty

Warranty (years)		5
Warranty extension optional (years)		10/20


## System data

Topology: Without galvanic separation - transformerless		✓
Internal protection according to IEC 60529		IP 21
Protective class according to IEC 62103		II
Overvoltage category according to IEC 60664-1 Input side (PV generator)		II
Overvoltage category according to IEC 60664-1 Output side (grid connection)		III
Pollution Degree		3
Environmental category (outdoor installation)		-
Environmental category (interior installation)		✓
UV resistance		-
Minimum cable cross-section of AC connecting line	mm <sup>2</sup>	2.5
Minimum cable cross-section of DC connecting line	mm <sup>2</sup>	2.5
Max. fusing on output side		B16
Operator protection (EN 62109-2)		RCMU/RCCB Typ B
Electronic disconnection device integrated		✓
Height	mm	608
Width	mm	340
Depth	mm	222
Weight	kg	9.6
Cooling principle - convection		-
Cooling principle - regulated fans		✓
Max. air throughput	m <sup>3</sup> /h	-
Max. noise emission	dBA	29
Ambient temperature	°C	-15...60
Max. installation altitude above sea level	m	2000 (6562 ft)
Relative humidity	%	0...95
Connection technology at input side - Phoenix Contact SUNCLIX		✓
Connection technology at output side - Plug Wieland RST25i3		✓

## Interfaces

Ethernet (RJ45)		1
RS485 (RJ45)		2
Modbus RTU (RJ10)		1
Analogue inputs		-
PIKO BA Sensor Interface		-

## Efficiency characteristics of PIKO 2.5 MP

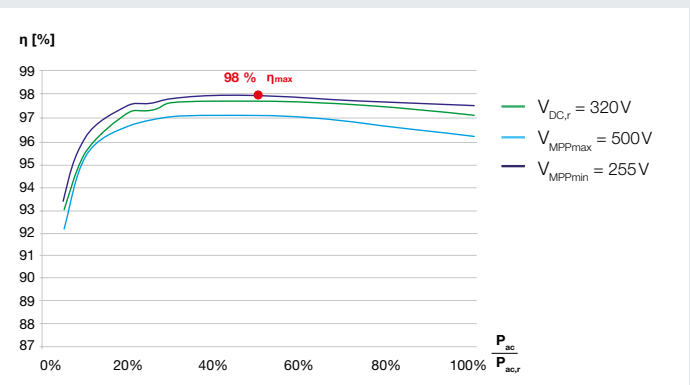

Smart connections.

## Contact

KOSTAL Solar Electric GmbH  
 Hanferstr. 6  
 79108 Freiburg i. Br.  
 Germany  
 Tel. +49 761 477 44 - 100  
 Fax +49 761 477 44 - 111  
 www.kostal-solar-electric.com