


EnergSol	
	Vida en ciclos: 2000 ciclos según IEC 60896-11
	Placa Tubular
	Bajo mantenimiento
	Reciclable

TIPO	VOLTS	CAPACIDAD C120 1,85VpC	LONGITUD x PROFUNDIDAD x ALTURA			PESO Kg
03 EnergSol 380	2	372	83	199	503	17,5
04 EnergSol 490	2	486	101	199	503	22,5
05 EnergSol 600	2	597	119	199	503	27,1
06 EnergSol 720	2	720	137	199	503	31,0
07 EnergSol 840	2	832	155	199	503	35,5
08 EnergSol 950	2	942	173	199	503	39,5
09 EnergSol 1050	2	1048	191	199	503	44,0
10 EnergSol 1110	2	1106	191	199	503	45,5

Densidad 1,26Kg/l a 25°C

Aplicaciones	
	Fotovoltaica

DOD [% C₁₀]

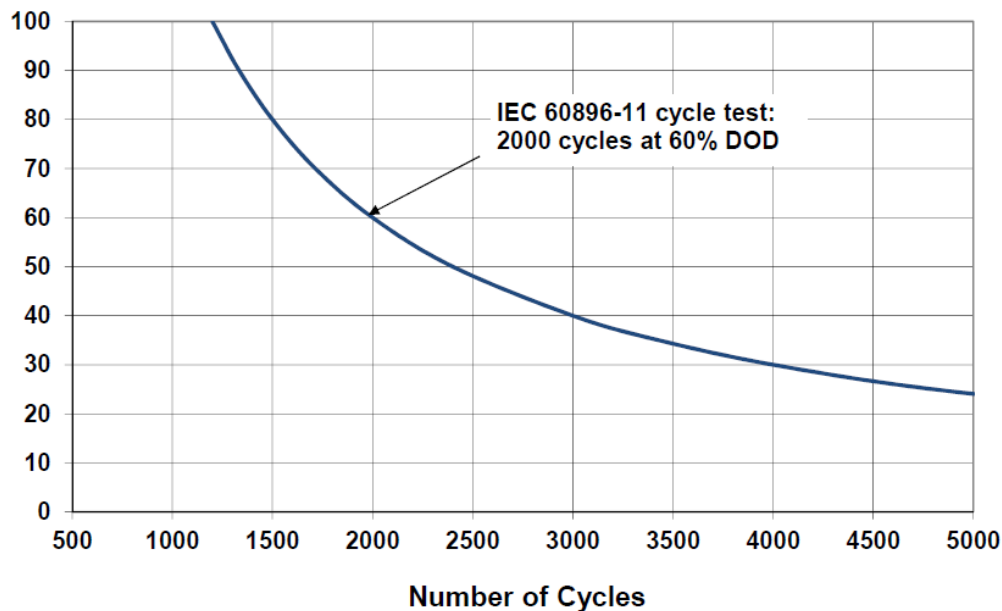

Type	C ₆ 1.75 V/C	C ₁₀ 1.80 V/C	C ₁₂ 1.80 V/C	C ₂₄ 1.80 V/C	C ₄₈ 1.80 V/C	C ₇₂ 1.80 V/C	C ₁₀₀ 1.85 V/C	C ₁₂₀ 1.85 V/C	C ₂₄₀ 1.85 V/C
03 EnergSol 380	267	285	294	318	351	360	363	372	384
04 EnergSol 490	352	376	388	420	455	473	478	486	512
05 EnergSol 600	436	464	482	518	555	579	587	597	642
06 EnergSol 720	516	552	574	620	669	696	702	720	768
07 EnergSol 840	591	632	658	710	767	802	816	832	899
08 EnergSol 950	668	715	744	804	869	909	924	942	1019
09 EnergSol 1050	748	800	834	901	974	1019	1037	1048	1144
10 EnergSol 1110	825	874	908	969	1035	1076	1088	1107	1182